
Implementing Multi-site Clustering



Greg Dickinson
Network Engineer

www.hyperpowered.com

Multi-site Clustering

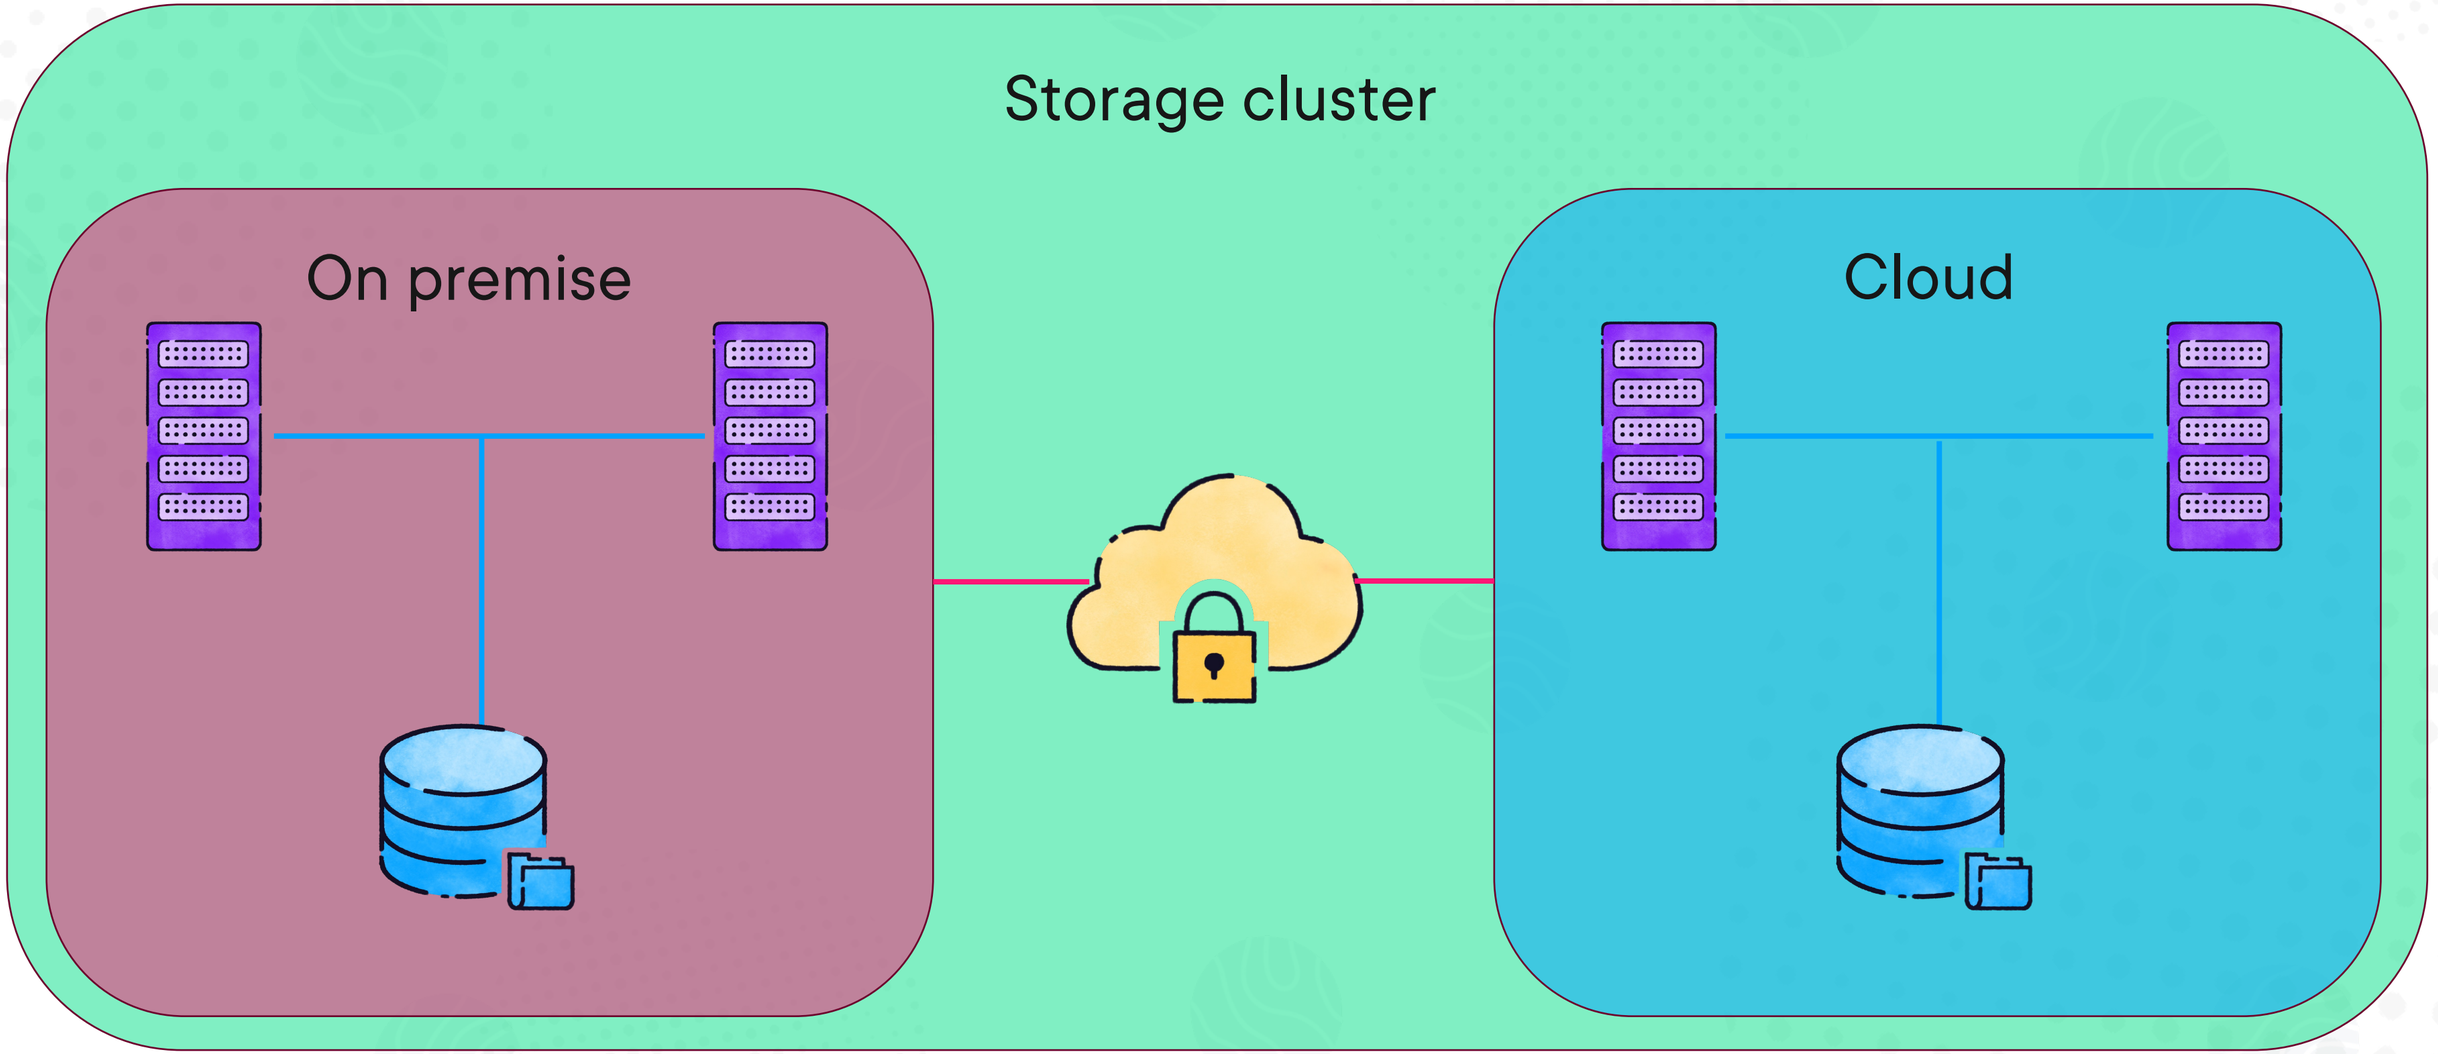

Storage Replication

Requires two disks, storage and log

Storage/log must be identical

Initialized as GPT, formatted as ReFS or NTFS

Replicated storage can’t be on the system drive

Logs should be faster than storage

Log storage defaults to 8 GB; volume must be at least 10 GB

Demo: Configure Multi-site

Configure storage replication between cluster nodes at different sites